

Commercial Tapware

W
Lead Free
AS 3718
23145



CLEANAJET®
STAINLESS STEEL


Compact Exposed Wall Mount Pre-Rinse Unit

T-3M53430-C


- Full S/S construction
- Compact model designed for applications where space saving is a priority
- Equipped with a water saving 6 star 4.5LPM variable trigger valve
- Wall bracket included
- Fully assembled and bench tested, with a unique traceable serial number
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 80 degrees



Side

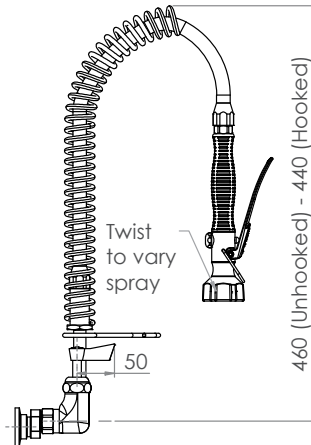

Front

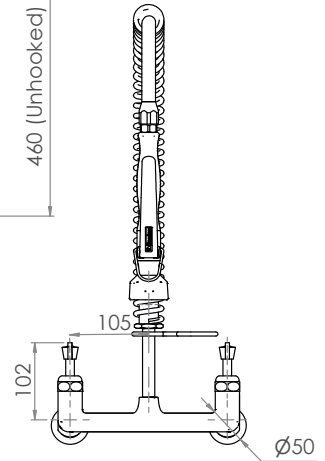

Top

Set-Out 205 Centres
Min 195 - Max 215

