

Commercial Tapware



GUARDIAN[®] TAPWARE

Gooseneck Bench Mounted Sensor Tap

T-3MSS-GHMST21B



T-3MSS-GHMST21M

T-3MSS-GHMST21B-TV

T-3MSS-GHMST21M-TV

Available in mains or battery powered, with optional tempering valve

- Battery powered – 2x CR123 3V Lithium Batteries Estimates 80,000 cycles
- Mains powered – 6V transformer
- Full S/S construction
- Sensor range nominal: 50mm – 200mm
- Maximum run time: 60 seconds
- WELS 6 Star 3.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 50 degrees

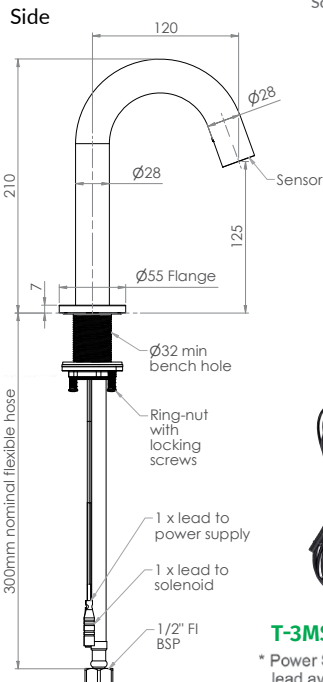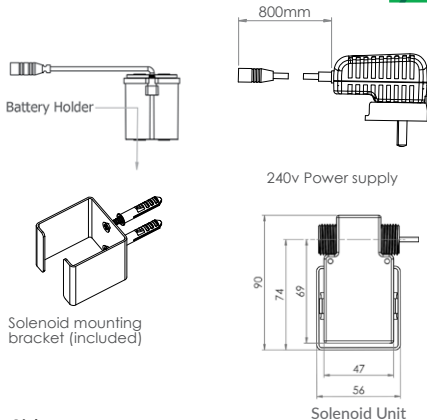

T-3MSSP-HMST-3M

* Power Supply with 3 metre lead available separately