

One Drawer, One Bay Freezer Station


Series: ProSpec

Dimensions: 455 mm (W) × 765 mm (D) × 845 mm (H)

Gross Volume: 105 L

Project: _____

Item #: _____

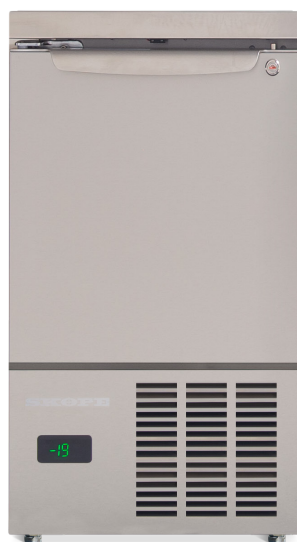

A robust single deep-drawer freezer designed to sit seamlessly alongside cooking stations and benchtops in high demand environments such as restaurants, clubs, pubs, and cafés. The freezer is engineered and certified to safely store food in ambient environments of up to 40°C (climate class 5). With compliant 5L1 performance, storage temperatures are adjustable via the SKOPE-connect smartphone app from -21°C to -15°C. The freezer is made from food-safe 304 AISI stainless steel throughout the interior and exterior ensuring durable construction. The high capacity, 380 mm deep drawer is ideal for storing bulk frozen items such as chips, fish and vegetables, and features an ergonomically designed 3 mm gauge stainless steel handle, and built-in barrel lock. The drawer is also compatible with 1/2 and 1/9 GN pans. The 765 mm deep cabinet with a full welded integrated worktop can be configured to suit multiple installation options. At 845 mm high (to the worktop), it provides the option to sit under a bench or for standalone use. Optional accessories include a 450 mm high detachable splash back with 2 fry basket channels (suitable for 4 fry baskets), and a removable drip tray. The energy efficient refrigeration system uses R290 natural refrigerant for low energy consumption, low heat discharge, and low noise output. The freezer includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The freezer is certified to all regional refrigeration and electrical safety standards.



Warranty




Natural Refrigerant



304 Stainless Steel



SKOPE-connect

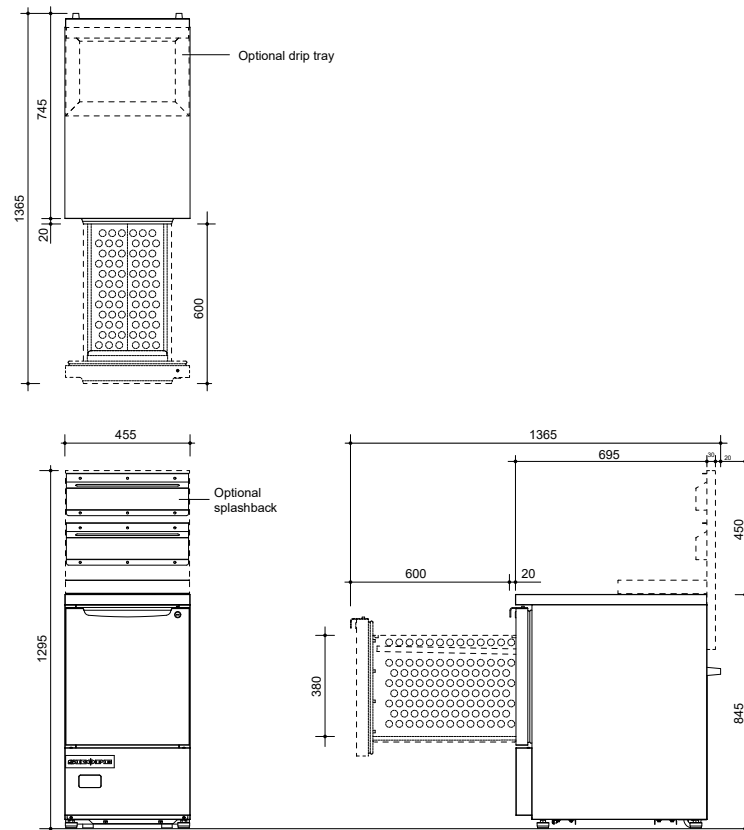

Cabinet

Range	ProSpec				
Finish	Stainless steel 304 AISI				
Insulation	Type	PU foam			
	Thickness (mm)	40			
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)			
Drawers	Lock	Barrel			
	Width (mm)	285	Depth (mm)	505	Height (mm) 380
Lighting	None				

Dimensions[†]

	External	Internal	Packed
Width (mm)	455	375	520
Depth (mm)	765	595	820
Height (mm)	845 (2 × castors, 4 × stabilising feet)	470	1000
Weight (kg)	60		72
Gross Volume (L)	105		
Footprint (m²)	0.3		

Ventilation (mm)

Top	0	Sides	50	Rear	50
-----	---	-------	----	------	----

Performance

Product Temperature Range (°C)	-21°C to -18°C (adjustable* from -21°C to -15°C)
Maximum Ambient Temperature (°C)	40
Sound Level (dB(A))	63.7

Energy Rating Standards

Energy Efficiency Class	C
Energy Efficiency Index	47.8
Climate and Temperature Class	5L1
Total Energy Consumption	3.5 kWh/24 h
Annual Energy Consumption	1278.6 kWh

Electrical

Supply	220-240 volts a.c., 50 Hz, Single phase supply
Cord	2000 mm power cord with 3-Pin, 10 amp, G-Type plug
Current Draw (A)	2

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Split System		
Cartridge Weight (kg)	0		
Refrigerant/Charge	R290/100 g		
Nominal Capacity (W)	270 (ASHRAELBP32)		
Heat Rejection (W)	Average	146	Peak 152
Defrost Type	Manual		
Drainage	No plumbing required		

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	-5 mm to +10 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm



P.FSF.1.D1
on the SKOPE website

* Accessible via the free SKOPE-connect™ app.