

## Two Drawer, One Bay Freezer Station

**Series:** ProSpec

**Dimensions:** 455 mm (W) × 765 mm (D) × 845 mm (H)

**Gross Volume:** 105 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_



A robust double deep-drawer freezer designed to sit seamlessly alongside cooking stations and benchtops in high demand environments such as restaurants, clubs, pubs, and cafés. The freezer is engineered and certified to safely store food in ambient environments of up to 40°C (climate class 5). With compliant 5L1 performance, storage temperatures are adjustable via the SKOPE-connect smartphone app from -21°C to -15°C. The freezer is made from food-safe 304 AISI stainless steel throughout the interior and exterior ensuring durable construction. The 125 mm deep drawers are ideal for storing bulk frozen items such as chips, fish and vegetables, and feature ergonomically designed 3 mm gauge stainless steel handles, and built-in barrel locks. The drawers are also compatible with 1/3 and 1/9 GN pans. The 765 mm deep cabinet with a full welded integrated worktop can be configured to suit multiple installation options. At 845 mm high (to the worktop), it provides the option to sit under a bench or for standalone use. Optional accessories include a 450 mm high detachable splash back with 2 fry basket channels (suitable for 4 fry baskets), and a removable drip tray. The energy efficient refrigeration system uses R290 natural refrigerant for low energy consumption, low heat discharge, and low noise output. The freezer includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The freezer is certified to all regional refrigeration and electrical safety standards.



Warranty




Natural Refrigerant



304 Stainless Steel



SKOPE-connect

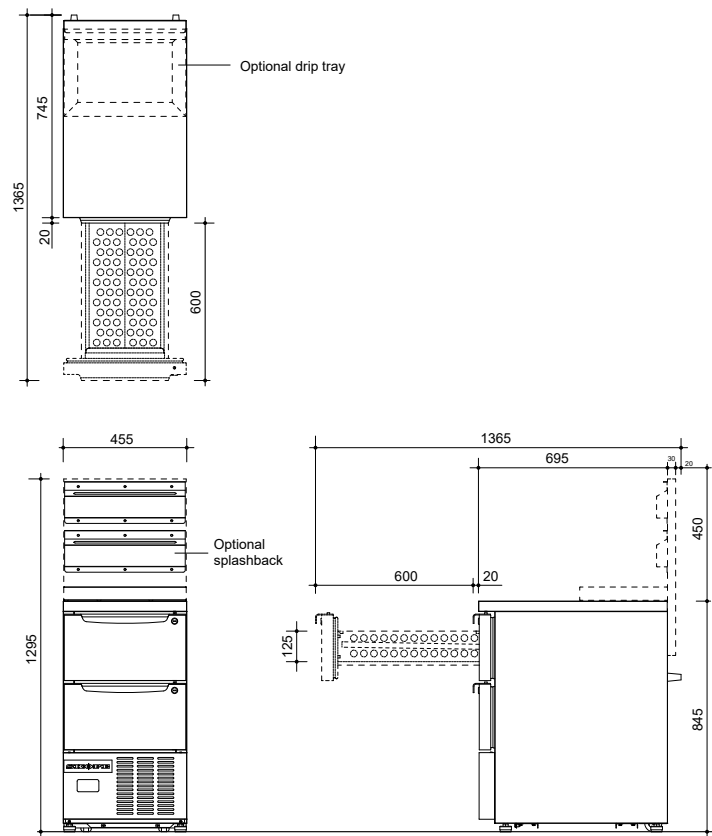

Cabinet

|            |                          |                                 |             |     |
|------------|--------------------------|---------------------------------|-------------|-----|
| Range      | ProSpec                  |                                 |             |     |
| Finish     | Stainless steel 304 AISI |                                 |             |     |
| Insulation | Type                     | PU foam                         |             |     |
|            | Thickness (mm)           | 40                              |             |     |
|            | Blowing Agent            | Cyclo-iso pentane (C5H10/C5H12) |             |     |
| Drawers    | Lock                     | Barrel                          |             |     |
|            | Width (mm)               | 285                             | Depth (mm)  | 505 |
| Lighting   | None                     |                                 |             |     |
|            |                          |                                 | Height (mm) | 125 |

Dimensions†

|                  | External                                | Internal | Packed |
|------------------|-----------------------------------------|----------|--------|
| Width (mm)       | 455                                     | 375      | 520    |
| Depth (mm)       | 765                                     | 595      | 820    |
| Height (mm)      | 845 (2 × castors, 4 × stabilising feet) | 470      | 1000   |
| Weight (kg)      | 65                                      |          | 77     |
| Gross Volume (L) | 105                                     |          |        |
| Footprint (m²)   | 0.3                                     |          |        |

Ventilation (mm)

|     |   |       |    |      |    |
|-----|---|-------|----|------|----|
| Top | 0 | Sides | 50 | Rear | 50 |
|-----|---|-------|----|------|----|

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

| Linear dimensions | Single cabinet  |  | Multiple cabinets |                  |
|-------------------|-----------------|--|-------------------|------------------|
|                   |                 |  | At each joint     | At each end wall |
| Less than 1 metre | -5 mm to +10 mm |  | ±5 mm             | +15 mm           |
| More than 1 metre | -5 mm to +10 mm |  | -5 mm to +10 mm   | +15 mm           |

Performance

|                                  |                                                  |
|----------------------------------|--------------------------------------------------|
| Product Temperature Range (°C)   | -21°C to -18°C (adjustable* from -21°C to -15°C) |
| Maximum Ambient Temperature (°C) | 40                                               |
| Sound Level (dB(A))              | 63.7                                             |

Energy Rating Standards

|                               |               |
|-------------------------------|---------------|
| Energy Efficiency Class       | D             |
| Energy Efficiency Index       | 61.4          |
| Climate and Temperature Class | 5L1           |
| Total Energy Consumption      | 4.32 kWh/24 h |
| Annual Energy Consumption     | 1575 kWh      |

Electrical

|                  |                                                    |
|------------------|----------------------------------------------------|
| Supply           | 220-240 volts a.c., 50 Hz, Single phase supply     |
| Cord             | 2000 mm power cord with 3-Pin, 10 amp, G-Type plug |
| Current Draw (A) | 2                                                  |

Refrigeration

|                       |                                         |     |          |
|-----------------------|-----------------------------------------|-----|----------|
| Controller            | SCS Connect (SKOPE-connect™ compatible) |     |          |
| System Type           | Split System                            |     |          |
| Cartridge Weight (kg) | 0                                       |     |          |
| Refrigerant/Charge    | R290/100 g                              |     |          |
| Nominal Capacity (W)  | 270 (ASHRAELBP32)                       |     |          |
| Heat Rejection (W)    | Average                                 | 180 | Peak 182 |
| Defrost Type          | Manual                                  |     |          |
| Drainage              | No plumbing required                    |     |          |



P.FSF.1.D2  
on the SKOPE website

\* Accessible via the free SKOPE-connect™ app.