

3 Solid Door GN Compatible Salad Preparation Fridge

Series: ReFlex

Dimensions: 1800 mm (W) × 700 mm (D) × 1110 mm (H)*

* Height with legs is adjustable from 1120 to 1170.

Project: _____

Item #: _____



A three solid door salad preparation fridge designed to store food at safe temperatures in busy kitchens at venues such as restaurants, clubs, pubs, and cafés. It is engineered to operate in ambient environments of up to 40°C with the lids closed or 30°C with the lids open. Temperatures are adjustable from 1°C to 5°C, or are further adjustable via the SKOPE-connect smartphone app from 0°C to 15°C. The entire cabinet is made from 304 AISI stainless steel through the interior and exterior, over an insulating cyclopentane foamed core. The fridge is suitable for use with 7 × GN1/3 pans or 14 × GN1/6 pans and comes with a removable, food-grade, 13 mm thick plastic cutting board that is suitable to use as a salad preparation counter. The three self-closing solid swing doors with a stay-open position of 90° are fitted with built-in key locks. Inside the fridge, there is a door-activated LED light and 2 × adjustable height plastic-coated wire shelves per door. The side-mounted fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. It is fully front-breathing and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all regional refrigeration and electrical safety standards.



Warranty



Natural Refrigerant




304 Stainless Steel



GN-compatible



SKOPE-connect

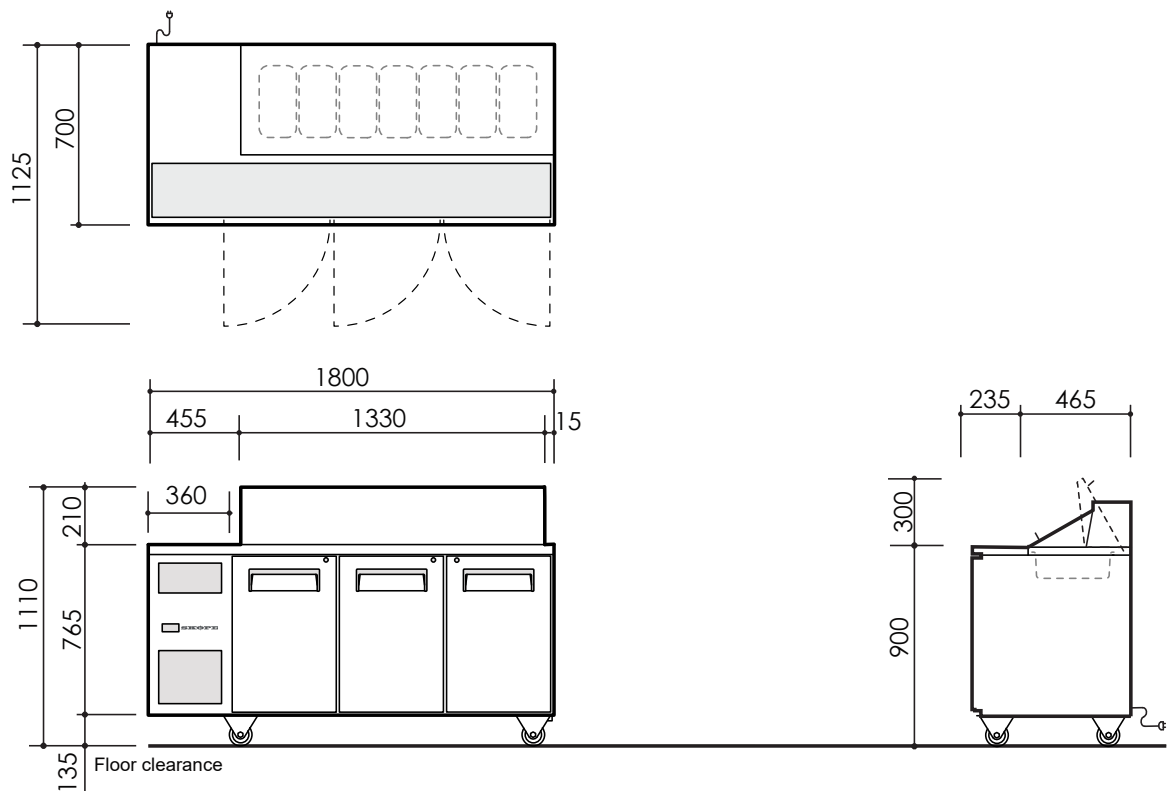

Cabinet

Range	ReFlex		
Finish	Stainless steel 304 AISI		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
	Type	Solid swing door (Barrel lock)	
Doors	Opening Size	Height (mm)	590
		Width (mm)	370
Shelving	Six adjustable height plastic coated wire shelves		
	Adjustable height shelves: Middle: 475mm wide x 510 deep, Outer: 415mm x 510 deep		
Gastronorm	Compatible		
Lighting*	2 x 400mm, 4W LED		

Dimensions†

	External	Internal	Packed
Width (mm)	1800	1350	1870
Depth (mm)	700	540	753
Height (mm)	1110 (standard castors)		
	1120 to 1170 (legs)	490	1160
	975 (plinth mount)		
Weight (kg)	162		203
Gross Volume (L)	357		
Footprint (m²)	1.26		

Ventilation (mm)

Top	190	Sides	0	Rear	0
-----	-----	-------	---	------	---

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1°C to 5°C (adjustable* from 0°C to 15°C)
Maximum Ambient Temperature (°C)	40
Sound Level (dB(A))	63.2

Energy Rating Standards

Energy Efficiency Class	Exempt from Scheme
Energy Efficiency Index	Exempt from Scheme
Climate and Temperature Class	Exempt from Scheme
Total Energy Consumption	3.58 kWh/24 h
Annual Energy Consumption	1307 kWh

Electrical

Supply	220-240 volts a.c., 50 Hz, Single phase supply
Cord	2000 mm power cord with 3-Pin, 10 amp, G-Type plug
Current Draw (A)	2.0

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	30		
Refrigerant/Charge	R290/90 g		
Nominal Capacity (W)	600		
Heat Rejection (W)	Average	150	Peak 160
Defrost Type	Automatic, electric		
Drainage	No plumbing required		



RF7.PPS.3.SD
on the SKOPE website

* Accessible via the free SKOPE-connect™ app.