

2 Solid Door Upright Fridge

Series: ReFlex

Dimensions: 1220 mm (W) × 760 mm (D) × 1985 mm (H)

Project: _____

Item #: _____



A two solid door upright fridge designed to store food at safe temperatures in busy kitchens at venues such as restaurants, clubs, pubs, and cafés. It is engineered to safely store food, and is energy-tested at climate class 5 to operate in ambient environments of up to 40°C. Certified M1 performance means guaranteed food storage between 1°C and 4°C, which is further adjustable via the SKOPE-connect smartphone app from -2°C to 15°C. The entire cabinet is made from 304 AISI stainless steel through the interior and exterior, over an insulating cyclopentane foamed core. With a 1985 mm height (including castors), 1220 mm width and 760 mm depth, it is suitable for food storage in back-of-house applications. The two self-closing solid swing doors are fitted with built-in key locks. Inside the fridge, there is a door-activated LED light and 5 × height-adjustable plastic-coated wire shelves per door. The top-mounted fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. It can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all regional refrigeration and electrical safety standards.



Warranty




304 Stainless Steel



Natural Refrigerant



SKOPE-connect

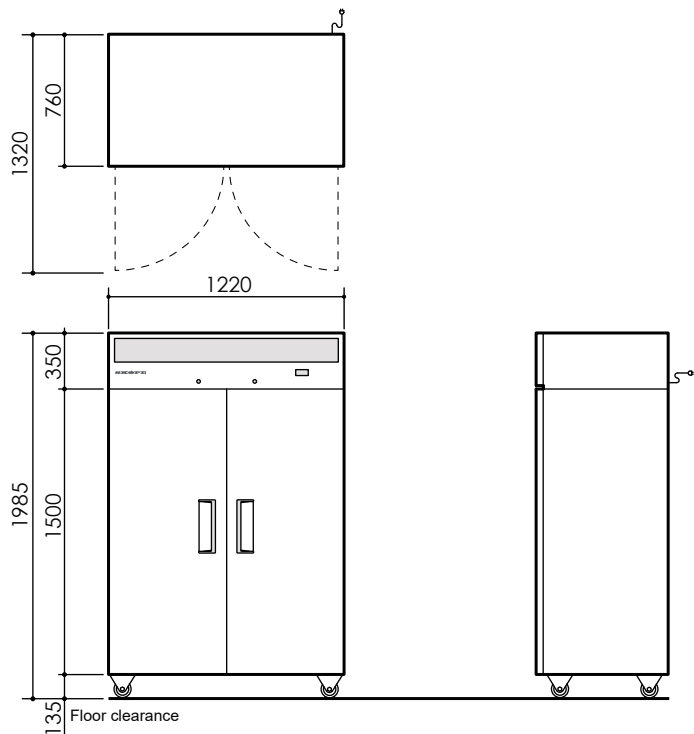

Cabinet

Range	ReFlex	
Finish	Stainless steel 304 AISI	
Insulation	Type	PU foam
	Thickness (mm)	50
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)
	Type	Solid swing door (Barrel lock)
Doors	Opening Size	Height (mm) 1375
		Width (mm) 495
Shelving	Ten adjustable height plastic coated wire shelves	
	Adjustable height shelves: 530mm wide x 530mm deep	
Lighting*	2 x 1200mm, 12W LED	

Dimensions†

	External	Internal	Packed
Width (mm)	1220	1100	1270
Depth (mm)	760	600	810
Height (mm)	1985 (castors)	1395	2000
Weight (kg)	159		174
Gross Volume (L)	921		
Net Volume (L)	712		
Footprint (m²)	0.93		

Ventilation (mm)

Top	300	Sides	0	Rear	0
-----	-----	-------	---	------	---

Product Loading

Facing	330 ml can	80	660 ml bottle	70
Loading	330 ml can	640	600 ml bottle	490

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1°C to 4°C (adjustable* from -2°C to 15°C)		
Maximum Ambient Temperature (°C)	40		
Sound Power Level (dB(A))	Standard	64.3	
	Hush Mode*	62.1	

Energy Rating Standards

Energy Efficiency Class	E		
Energy Efficiency Index	80.25		
Climate and Temperature Class	5M1		
Total Energy Consumption	3.91 kWh/24 h		
Annual Energy Consumption	1427 kWh		

Electrical

Supply	220-240 volts a.c., 50 Hz, Single phase supply		
Cord	2000 mm power cord with 3-Pin, 10 amp, G-Type plug		
Current draw (A)	2.0		

Refrigeration

Controller	SCS Connect		
System Type	Removable cartridge		
Cartridge Weight (kg)	22		
Refrigerant/Charge	R290/90 g		
Nominal Capacity (W)	650		
Heat Rejection (W)	Average	165	Peak 205
Defrost Type	Automatic, electric		
Drainage	No plumbing required		

* Accessible via the free SKOPE-connect™ app.



RF7.UPR.2.SD
on the SKOPE website