

Glass Door Display

## GDM-41-HC-LD

 Upright Retail Merchandiser Refrigerator, 2 Full Glass Slide Doors



| Dimensions                         |                                                                              |
|------------------------------------|------------------------------------------------------------------------------|
| External Width (mm)                | 1197                                                                         |
| External Depth (mm)                | 753                                                                          |
| External Height (mm)               | 1998                                                                         |
| Exclusions                         | Depth does not include 10 mm for door handle or 13 mm for rear access panel. |
| Net Volume (Litres)                | 722                                                                          |
| Gross Volume (Litres)              | 1160                                                                         |
| Display Area (m <sup>2</sup> )     | 1.2                                                                          |
| Supplied Shelves                   | 8                                                                            |
| Shelf Size (L x D mm)              | 531 x 523                                                                    |
| Internal Net Height (mm)           | 1300                                                                         |
| Unpackaged Weight (kg)             | 187                                                                          |
| Packaged Weight (kg)               | 198                                                                          |
| Packaged Dimensions (W x D x H mm) | 1270 x 839 x 2134                                                            |
| Supplied with                      | Levelling Screws. Optional castors sold separately.                          |

| Build                 |                                                                                               |
|-----------------------|-----------------------------------------------------------------------------------------------|
| Door Description      | 2 Full Glass Slide Doors                                                                      |
| Exterior Construction | Stainless Steel/Aluminium front, Aluminium sides and rear (Black or White Powder Coat option) |
| Interior Construction | White coated aluminium, stainless steel base                                                  |
| Air Intake Position   | Front                                                                                         |
| Ventilation Position  | Rear                                                                                          |
| Clearance Required    | 26 mm rear, zero sides                                                                        |
| Cord Length (Meters)  | 2.74                                                                                          |
| Internal Lighting     | LED                                                                                           |
| Standard w/ Locks     | Not Standard. Options available.                                                              |

| Technical                      |                                                                                                             |
|--------------------------------|-------------------------------------------------------------------------------------------------------------|
| Temperature Range              | 0.5 : 3.3°C                                                                                                 |
| Refrigerant                    | R290                                                                                                        |
| Voltage/Frequency/Phase        | 220-240V/50-60Hz/1                                                                                          |
| Amps                           | 2.2                                                                                                         |
| Watts                          | 506                                                                                                         |
| Temperature Class              | M1                                                                                                          |
| Operating Statement            | Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising. |
| Test Standard                  | EN 23953                                                                                                    |
| EEC                            | B                                                                                                           |
| Energy Efficiency Index        | 17.4                                                                                                        |
| Defrost Type                   | Auto                                                                                                        |
| Energy Consumption (kWh/24h)   | 4.39                                                                                                        |
| Energy Consumption (kWh/Annum) | 1601                                                                                                        |



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
[+61 61 563 07 05](tel:+61615630705)  
[+61 2 9619 9999](tel:+61296199999)


[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



Glass Door Display

# GDM-41-HC-LD

 Upright Retail Merchandiser Refrigerator, 2 Full Glass Slide Doors

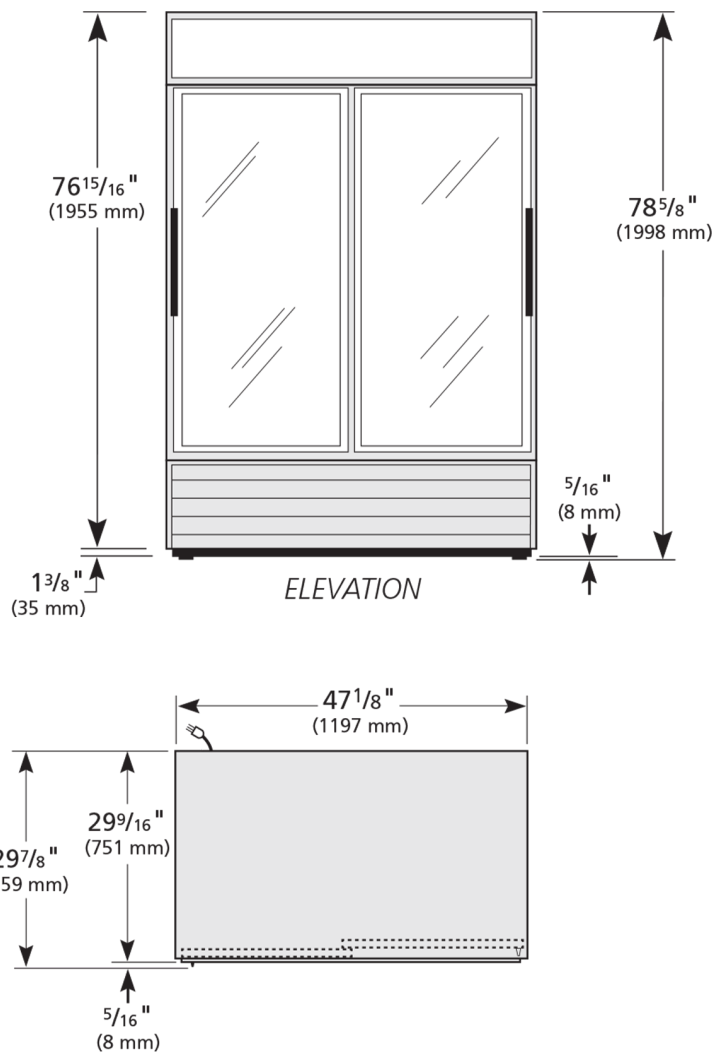

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

