

## Upright Cabinets

# T-35F-HC

 Upright Foodservice Freezer, 2 Full Solid Swing Doors



| Dimensions                         |                                                         |
|------------------------------------|---------------------------------------------------------|
| External Width (mm)                | 1004                                                    |
| External Depth (mm)                | 750                                                     |
| External Height (mm)               | 2074                                                    |
| Net Volume (Litres)                | 632.4                                                   |
| Gross Volume (Litres)              | 906                                                     |
| Supplied Shelves                   | 8                                                       |
| Shelf Size (L x D mm)              | 439 x 569                                               |
| Internal Net Height (mm)           | 1300                                                    |
| Unpackaged Weight (kg)             | 172                                                     |
| Packaged Weight (kg)               | 184                                                     |
| Packaged Dimensions (W x D x H mm) | 1156 x 902 x 2134                                       |
| Exclusions                         | Depth does not include 13 mm for rear access panel.     |
| Supplied with                      | Heavy duty lock-in-place ø 64 mm castors (83 mm height) |

| Build                 |                                                                       |
|-----------------------|-----------------------------------------------------------------------|
| Cord Length (Meters)  | 2.74                                                                  |
| Internal Lighting     | LED                                                                   |
| Door Description      | 2-Stainless Steel Solid Doors with Clear Aluminum Liner               |
| Door Opening          | Right (standard) or Left                                              |
| Exterior Construction | Stainless Steel Front with Aluminum Ends and GalFan Back and Top      |
| Interior Construction | Clear Coated Aluminum Liner, Stainless Steel Floor with Coved Corners |
| Air Intake Position   | Front                                                                 |
| Ventilation Position  | Rear                                                                  |
| Clearance Required    | 26 mm rear, zero sides                                                |
| Standard w/ Locks     | Standard                                                              |

| Technical                      |                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|
| Temperature Range              | -23.3                                                                              |
| Refrigerant                    | R290                                                                               |
| Voltage/Frequency/Phase        | 220-240V/50Hz/1                                                                    |
| Amps                           | 3.1                                                                                |
| Watts                          | -                                                                                  |
| Defrost Type                   | Auto                                                                               |
| Climate Class                  | 5                                                                                  |
| Operating Statement            | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard                  | EN ISO 22041:2019                                                                  |
| EEC                            | D                                                                                  |
| Energy Efficiency Index        | 56.9                                                                               |
| Energy Consumption (kWh/24h)   | 7.152                                                                              |
| Energy Consumption (kWh/Annum) | 2610                                                                               |
| Temperature Class              | L1                                                                                 |



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



## T-35F-HC

 Upright Foodservice Freezer, 2 Full Solid Swing Doors

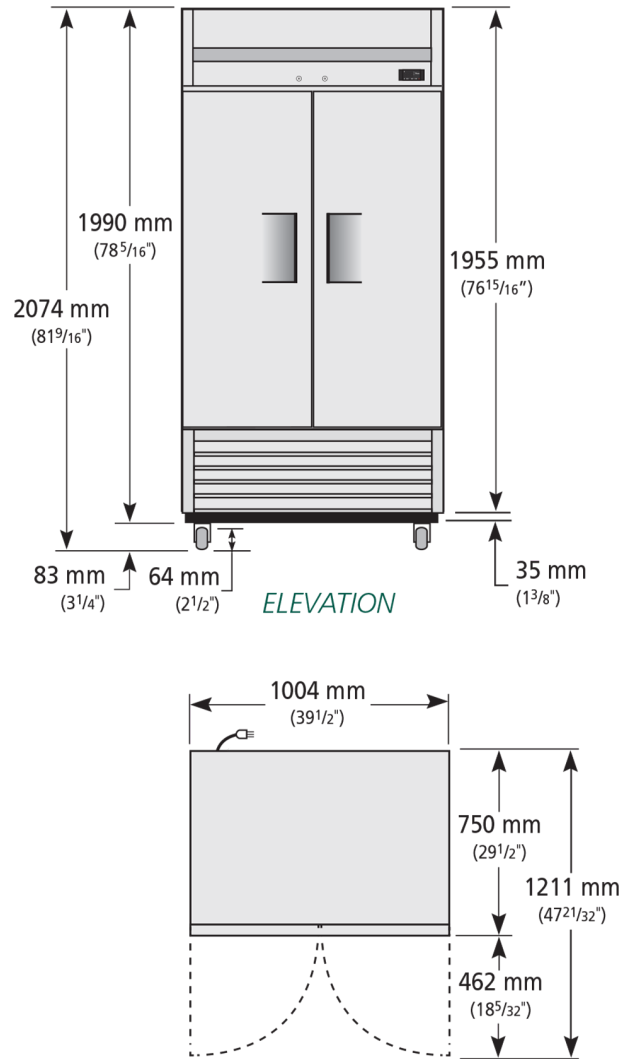

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

