

TUC-60D-2-HC

 Undercounter Foodservice Refrigerator, 2 Drawers + 1 Solid Swing Door



Dimensions		Build		Technical	
External Width (mm)	1534	Door Description	1 Solid Swing Door	Temperature Range	0.5 : 3.3°C
External Depth (mm)	766	Drawer Count	2	Refrigerant	R290
External Height (mm)	839	Drawers Location	Right (standard) or Left (option)	Voltage/Frequency/Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers.	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Amps	1.3
Net Volume (Litres)	226	Interior Construction	Clear coated aluminium, stainless steel base	Watts	299
Gross Volume (Litres)	439	Air Intake Position	Front	Climate Class	5
Supplied Shelves	2	Ventilation Position	Front	Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Shelf Size (L x D mm)	One 700 x 546 + One 700 x 349	Clearance Required	Zero back and sides	Test Standard	EN 16825
Internal Net Height (mm)	630	Cord Length (Meters)	2.13	EEC	B
Per Drawer Capacity (max depth mm)	1x 1/1 GN (150)	Standard w/ Locks	Standard	Energy Efficiency Index	31.5
Unpackaged Weight (kg)	191			Defrost Type	Auto
Packaged Weight (kg)	202			Energy Consumption (kWh/24h)	2.04
Packaged Dimensions (W x D x H mm)	1601 x 839 x 1207			Energy Consumption (kWh/Annum)	746
Supplied with	Heavy duty lock-in-place ø 64 mm castors (83 mm height) (reduced height option available, totals 810 mm)				



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia


0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com




TUC-60D-2-HC

 Undercounter Foodservice Refrigerator, 2 Drawers + 1 Solid Swing Door

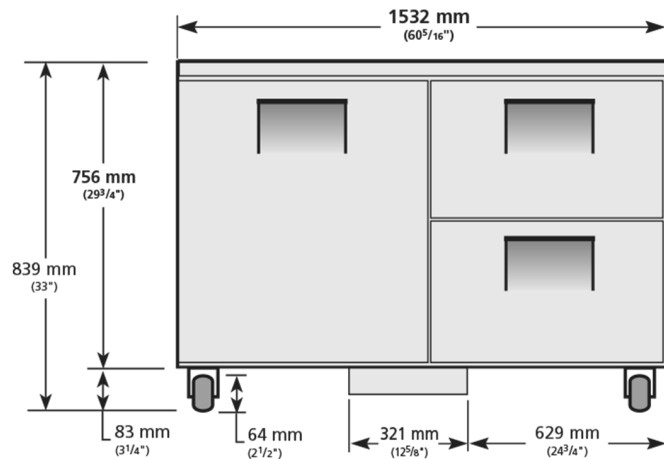

ELEVATION

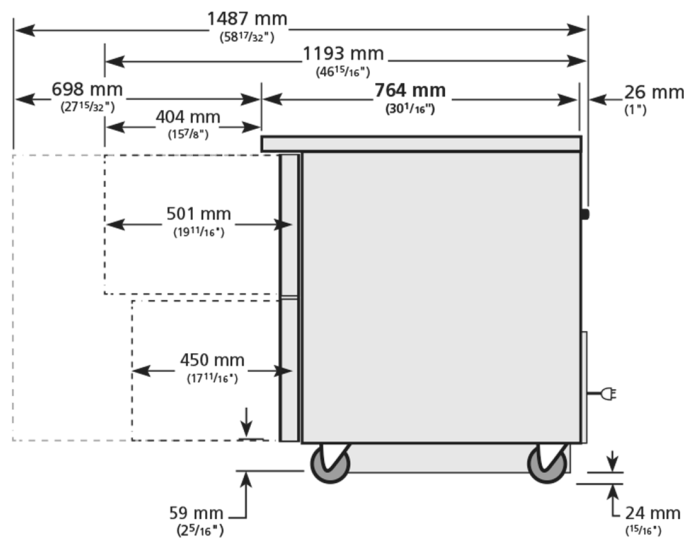

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

