

DATA SHEET

Mach GT41.21AP



Premium Line Glasswasher

GT41.21AP



Build

- Constructed entirely from 100% AISI Stainless Steel with no plastic components. This machine delivers exceptional strength, the highest level of durability, and long-lasting performance, making it ideal for demanding environments.
- Full AISI304 stainless-steel components including armoured stainless steel elements, stainless steel boiler, filters, hinges, upstands, wash arms, rinse arms, plugs and jets.
- Double-wall fully insulated stainless steel construction providing enhanced thermal efficiency, sound insulation and best in class energy consumption.
- Double-walled, self-closing insulated front door ensures improved insulation and energy efficiency while maintaining convenience after each use.
- Magnetic microswitch automatically cuts off the appliance's operation when the door is opened, ensuring safety during use.
- Independent stainless steel upper and lower washing and rinsing arms, which are easily removable for effortless cleaning and maintenance.
- The tank is constructed with rounded corners, ensuring easy cleaning and maintaining the highest hygiene standards.
- The boiler and tank are heated through thermostatically protected armoured stainless steel heating elements, ensuring efficient heat exchange.
- Built-in insulated atmospheric rinse tank is constructed from AISI 304 stainless steel, providing best in class insulation and durability for optimal performance.
- Water levels are designed to sit below the tank filter line for improved health and safety. This makes them the ideal model for large restaurant chains and contract customers.
- Touch control panel features 5 preset wash cycle times (60-90-120-150-180 seconds) offering easy operation and the flexibility to select the ideal cycle for different cleaning needs.
- The displays show the current temperatures of both the boiler and tank, providing real-time visual monitoring.
- The display features a countdown of the washing cycle in minutes and seconds, providing real-time tracking of the remaining time for each cycle.
- Fully programable digital interface allows complete adjustment of wash and rinse timings as well as special programs for reverse osmosis and other requirements. It also offers technical onboard diagnostics and error reporting to facilitate easy maintenance.
- Outstanding wash results are guaranteed with a high-powered wash pump, ensuring thorough cleaning at 60°C, followed by a hygienic rinse at 85°C for optimal sanitation.
- Built-in drain pump ensures efficient drainage and prevents debris buildup, thanks to the machine's advanced filtration systems.
- Built-in secondary powerful rinse booster pump, constructed from stainless steel, guarantees optimal rinse pressure for superior cleaning performance.
- Built-in detergent and rinse aid pumps with easy dosage adjustments ensure precise and efficient use of cleaning agents.
- Built-in timed manual cold rinse quickly cools heated glasses and dishes, ensuring they are ready for service in less time. This function is available when the machine is connected to Cold Water. If the machine is connected to Hot Water, it will act as a secondary Hot Rinse.
- The self-cleaning cycle (CLN) automatically cleans the machine to the highest hygiene standards at the press of a button, ensuring safe handling and minimal effort.
- Partial water change each cycle, automatically drains approximately 2.5 liters of dirty water between the wash and rinse phases, ensuring cleaner results with every cycle. This system ensures a complete water change regularly whilst maintaining the highest levels of hygiene.
- The washing chamber features a high 30.5 cm clearance, allowing for the accommodation of larger items and providing flexibility for various washing needs.
- Compatible with 40x40 cm or 14' x 17' basket

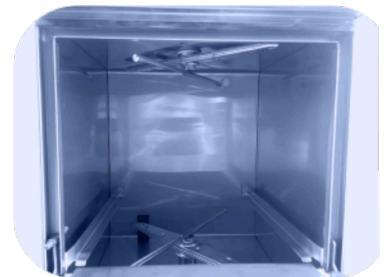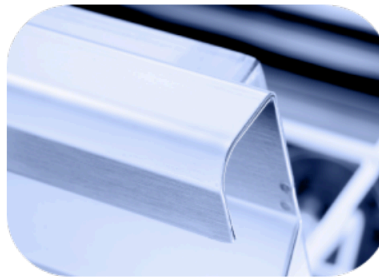

DATA SHEET

Mach GT41.21AP

Premium Line Glasswasher

GT41.21AP

Technical specifications

Supplied with

Baskets for Glasses 40cm x 40cm	2
Saucer insert	1
Cutlery Holder	1
Set of Stainless Steel adjustable Legs	1

External Size

External Width	480
External Depth	545
External Height	740 (without legs)

Electrical Loads

Washing Pump Power	0.30 Kw / 0.4HP
Booster Pump Power	0.3kw
Boiler Heating element	3 kw
Tank Heating element	1.4 kw
Total power (kw)	3.3 kw
Voltage	240 1N/50Hz
Plug supplied	15A
Power Cable	3 x 1.5 mm2

Plumbing Specs

Hot water connection (Recommended)	Max 60°C
Cold water Connection (Optional)	Not recommended
Inlet Water Connection	Ø3/4" G
Water Drain connection	Ø30mm with 55mm Height
Mains Pressure	1.5 - 3 Bar
Water Hardness	> 10/12°F or 5.5/7°D Install with a decalcifier
Tank capacity	12.5 litres
Boiler capacity	4.7 Litres
Water consumption	2.75 Litres per cycle
Clean Water discharge	2.5 Litres per cycle

Washing Specs

Washing Power	720 to 2160 pc/hr
Rinse Temp	82 Degrees
Wash Temp	60 Degrees
Useful Washing Height	305mm
Basket Size	400x400 or 14" x 17"
Cycle Times	60-90-120-150-180 seconds
Noise Level at 1 mt	< 70 dbA.



Build Inclusions

Full AISI304 stainless-steel components including:	✓
-Elements	✓
-Boiler tank	✓
-Filters	✓
-Hinges	✓
-Upstands	✓
-Wash arms	✓
-Plugs	✓
-Jets	✓
Drain Pump	✓
Booster Rinse Pump	✓
Electric Rinse aid Pump	✓
Electric Detergent Pump	✓
Atmospheric Rinse Tank and Boiler	✓
Partial water discharge per cycle	✓
Double Wall insulated Body	✓
Double Wall insulated self-closing door	✓
Auto Stop Door Microswitch	✓
Independent Top and Bottom washing / Rinsing arms	✓
Fully programable intuitive digital interface	✓
Cold Rinse Cycle	✓
Cleaning Cycle	✓

Warranty

2 Year Warranty	2 years parts and labour
------------------------	--------------------------




**Subject to a preventative maintenance plan*

DATA SHEET

Mach GT41.21AP

Premium Line Glasswasher

GT41.21AP

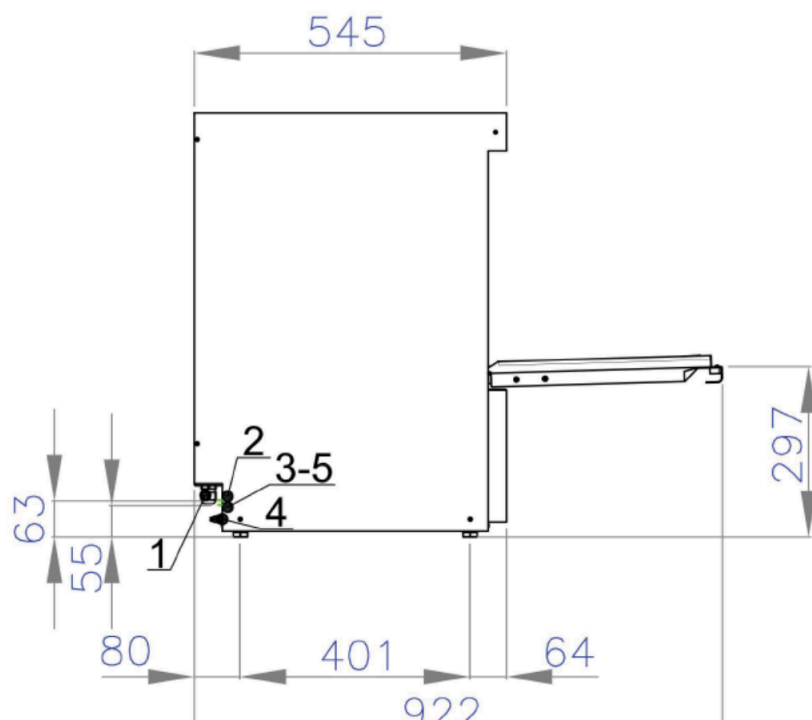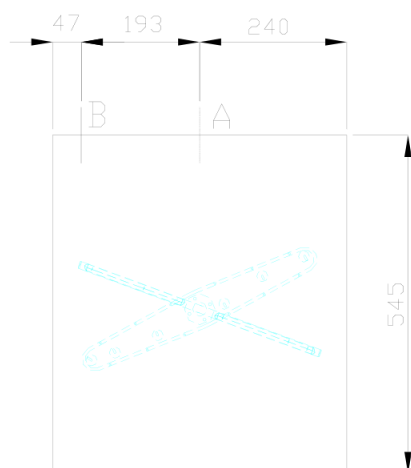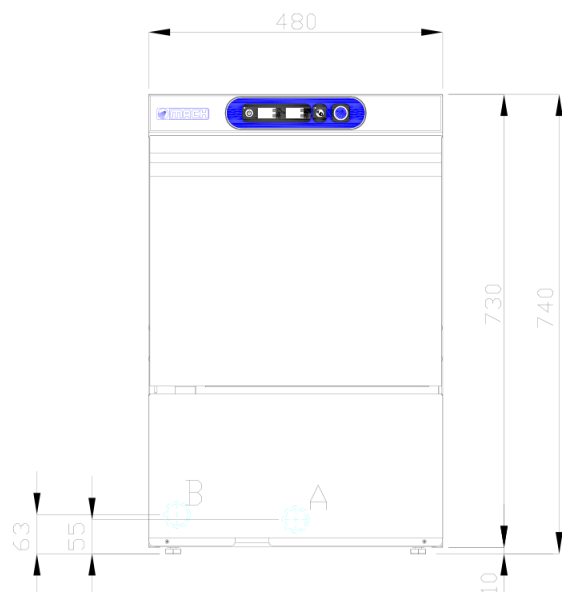

1	Power cable entry 3x1,5 (230Vx1-50Hz)
2	Water drain pipe Ø30 Hmax=6 cm.
3	Water loading pipe Ø3/4"G
4	Equipotential
5	Dosing pumps entry
A	Water drain
B	Connection to water mains

Controls



1	ON/OFF key
2	Warning LED
3	Start key
4	Boiler Element LED
5	Tank Element LED
6	Boiler display

7	Tank display
8	Rinse/Time key
9	Cold rinse LED
10	Thermostop LED
11	Pro-Memory LED